

## Series 1800

## Slider Configuration

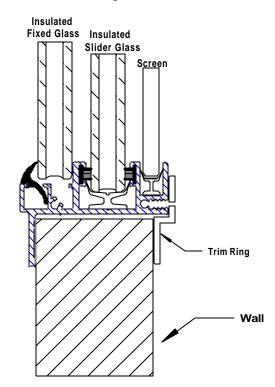

## **Stationary Configuration**

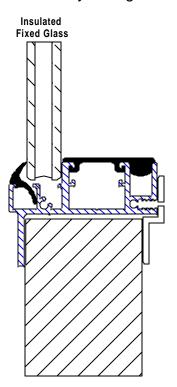

Series 1800 Motion Windows is designed for 1/2" dual pane glass-providing many product benefits including superior insulation, minimal air and wind intrusion, reduced condensation, and noise reduction. They are manufactured with solid tempered glass, true double seals, anodized perforated aluminum spacers, and high quality two-part absorption media for a long, trouble free life.

The Series 1800 frame can also be used 1/2" thick solid tempered single pane applications where strength is the primary concern rather than the insulating properties of the window.

## Specifications:

Shapes- Rectangle, Parallelogram, Single Slope, T-Sliders, and others

**Mounting** - Interior trim ring and stainless steel fasteners (included)

Wall Thickness - 3/4" to 3 1/4"

Radius - 3"

Frame Depth - 1 15/16"

Glass - Dual Pane Insulated Units, 1/2" Thick (1/8 - 1/4 -1/8)

Glass Tint - Clear, Solex, Bronze, Solar Grey, Dark Grey, Solar Cool Bronze (Mirrored), Obscure

Frame - Anodized Clear (Silver), Anodized Black, or Powder Coat (Black, Grey, or White)

Screen - Sliding removable screen